RevNo	Revision note	Date	Signature	Checked

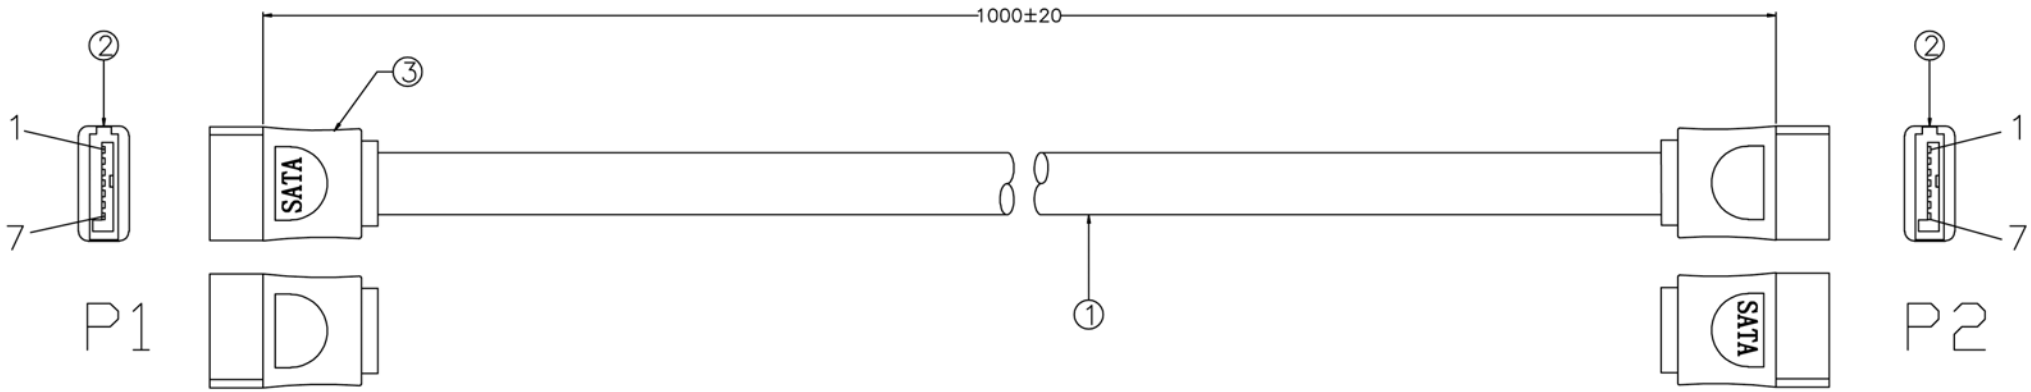

PIN OUT

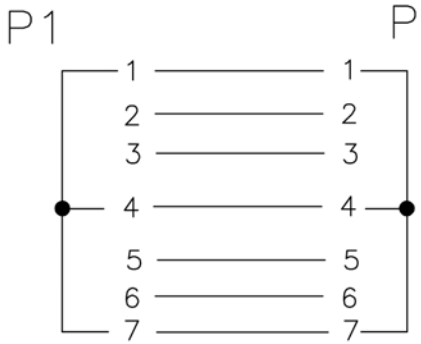

REQUIREMENTS:

1:100% short and open testing.

2:Test conditions
DC300V /10MS
Insulation resistance 10MΩ(Min)
Conduction resistance 5Ω(Max)

NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT
③	MOLDED	BLACK 45P PVC	0.003	KG
②	CONNECTOR	SATA 7PIN FEMALE,SHORT BLOCK	2	PCS
①	CABLE	SATA CABLE:UL2725(26AWG*2F+AL)*2C+3D OD:2.2*7.6MM,DARK RED JACKET	1	M

Itemref	Quantity	Title/Name,designation,material,dimension etc		Article No./Reference	
Designed by	Checked by	Approved by - date MARCH 4.2012	File name SATA 7P/F-7P/F L=1M	Date MARCH 4.2012	Scale FREE
		26-1000			
		26-1000		Edition 1	Sheet 1/2